

TENDER-DOCUMENT

For

“WATER BOUND MACADAM ROAD AND PARKING ”

Due On : 4.30 hrs on 14th February 2011

Opening : 15.00 hrs on 15th February 2011

*Completion Time : One Month from the date of
award of work.*

EMD : Rs. 20,000/-

Submission : Tender box of DOEACC Centre

Srinagar

DOEACC CENTRE, SRINAGAR/JAMMU

(An Autonomous Body of Department of Information Technology,
Ministry of Communications & Information Technology, Govt. of India)
SIDCO Electronics Complex, Old Airport Road, Rangreth
Phone Nos. 0194-2300501, 2300502, 2300805, 2300949 Fax No: 0194-2300501

Details of the Agency

1) Name & Registration of the firm/Contractor (attested copies of registration certificate)

.....
.....

2) License No. of the agency/Contractor.

.....

3) Date of establishment of the firm.

.....

4) Details of the experience in the field (supporting documents)

.....

5) Latest income tax clearance certificate.

6) Earnest money details:-

a) Name of the Bank

.....

b) Date of issue of Demand Draft.

.....

c) Amount of Demand Draft.

.....

Signature of the Tenderer

DOEACC Centre Srinagar/Jammu General Conditions of Tender

1. The tenderer is required to quote the rates for items mentioned in tender Specifications sections.
2. Conditional tenders shall be rejected even though the rates quoted are the lowest.
3. The rates quoted by tenderer should be fixed having validity for a period of three months from the date of opening of the tender.
4. The tenderer is required to enclose with the tender an earnest money for an amount Of Rs.20,000/- in the shape of a call deposit pledged to Director DOEACC Centre Srinagar/Jammu without which the tender shall not be accepted.
5. The Director DOEACC Centre Srinagar / Jammu reserve the right to reject any / all the tenders partly/fully without assigning any reason thereof.
6. The contract shall be time bound (30 days from the date of allotment of works) and no extension in the period of completion of works as mentioned in the tender agreement will be admissible.
7. In case of delay in execution of work as per time schedule mentioned in tender, penalty 0.5% per week or part thereof up to 10% of total cost of the work shall be imposed which will be recovered from contractor from any money which shall become due or which becomes due to him from this center. However, Director DOEACC may waive off the penalty on his discretion and extend the duration of works to be carried out.
8. The bad/defective works or works which are not found to be executed as per the tender specifications shall be rejected.
9. 10% deposit shall be deducted from each running bill and shall be released on the completion and inspection of the works as per the agreement. Final payment shall be made to the contractor after the final measurements, inspection / verification of the works by the inspection committee and taking over of the same.
10. The work shall have to be executed strictly in accordance with the drawings, specifications and at site requirements or as directed by the Engineer In-charge of DOEACC Centre Srinagar /Jammu, Srinagar.
11. The items which are not covered in this tender but subsequently found essential during execution of works shall also be undertaken by the contractor, payment for the same shall be released as per latest schedule of rates applicable in the J& K State Govt. Public Works Deptt. without any appreciation/depreciation thereon . If the said works are not covered in the schedule of rates, same shall be paid on LMR(lowest market rate) basis to be certified by the Officer in-charge of this Centre with maximum upto 10% contractors profit on approval of the Competent authority.


12. The consumption of material will be as per the engineering codes and those not covered in the code will be as per the manufacturer's guidelines.
13. The samples of all materials procured by the contractor for execution of work shall be got approved from the engineer in-charge before the start of the work.
14. The contractor shall be responsible for compaction and consolidation of all works. Any slackness towards the same will be viewed seriously and if in the opinion of the engineer in-charge, any damage to the works is caused due to inadequate compaction and consolidation then such work shall have to be re-laid by contractor at his own cost.
15. The water / electricity and other equipments/tools required for the work shall have to be arranged by the contractor at his own cost in sufficient quantity.
17. All the taxes as applicable shall be applied / deducted on the gross value of the contract at the rates prevailing at the time of payment.
18. The firm / contractor registered with sales tax department shall only be eligible to tender the work. The contractor shall indicate his CST/GST & PAN/TAN particulars in the tender.
19. The contractor will abide by all labour laws and will be personally responsible for any casualty / eventuality / accident or any labour dispute during the execution and completion of the work.
20. The quantities advertised in the tender are based on tentative estimates, which can increase or decrease by 20% as per necessity at site.
21. Any item which is not found necessary at site during execution of work can be deleted and no claim whatsoever shall be entertained on the said account.
22. The watch and ward of all materials / machinery shall be responsibility of the contractor /agency.
23. The contractor at his cost shall conduct all necessary repairs of defective works within defect liability period of six months.
24. Defect liability period: - 90 % deposit of the contractor shall be released on the virtual completion, handing over and verification of the work. The remaining 10% deposit & E.M.D shall be released after six months from date of completion of the work on submission of report of the engineer in-charge after obtaining approval by the competent authority.
25. In case any dispute or difference arises between the parties with regard to interpretation or working of the agreement or rights, liabilities or duties arising out of it. The matter shall be referred to a sole arbitrator to be appointed the Director, DOEACC Centre, Srinagar /Jammu and the decision of the arbitrator shall be binding on both the parties.
26. Director DOEACC Centre Srinagar/Jammu reserves the right to reject/stop any work/works during their currency without assigning any reason.

RATES QUOTED BY CONTRACTOR

S. N	Particulars of items/ Specifications	Estd Qty	Unit	Unit rate	Amount
1)	<i>Earthwork in excavation over areas exceeding 50cm in depth including dressing to camber, disposal of excavated earth upto 50mts and disposed earth to be leveled & neatly dressed.</i>	500 cum	Cum		
2)	<i>Sub-grade: Providing, laying, watering & compacting (with roller of 8-10 tonne capacity) aggregate size not exceeding 90mm granular material. Sub grade to be properly consolidated with roller including dressing to camber, making good the undulations with earth and rerolling the subgrade. .Cross sections & density finished work to be measured including carriage. Sub-grade to be laid in 2 layers , each rolled to a proper gradient & camber</i>	500 cum	Cum		
3)	<i>Soling/base course: Supplying, stacking & conveying of graded stone aggregate to site of sieve range 63-45mmsize (quarry material) including carriage.</i>	200 cum	Cum		
4)	<i>Supplying, stacking & conveying of stone-screening at site. These should be chippings of 12-20mm.The amount should be 0.075-0.128Cum per 10sqm of road surface.</i>	50 cum	Cum		
5)	<i>Supplying, stacking & conveying of moorum at site. This shall comprise blindage. The blindage should be locally available moorum, sand containing 10-20% clay etc. The amount should be from 0.12-1.16cum per 10sqm of road surface.</i>	50 cum	Cum		
6)	<i>Laying WBM with specified coarse aggregate stone, Screenings, blindage & sand spreading & consolidating the surface with road roller of 8-10 tonne capacity after every layer of above specified materials. Sand to be used as curing material. A thin film of 12mm would be sufficient.</i>	200 cum	Cum		
7)	<i>Providing and fixing 15cm dia at top 20cm dia at bottom and 90cm high precast reinforced cement concrete 1:1.5:3 boundary stone (around central island) as per standard design including finishing smooth with cement mortar1:3 including cost of excavation, refilling and concreting.</i>	11 cum	cum		
8)	<i>P/L 25 mm th. Premix carpet surfacing with mix plant and paver finished wih 1.80 cum and 0.90 cum of stone chipping of 13.2 and 11.2 mm size respectively per 100 sqm and 52/56 kg of hot bitumen per cum of stone chipping of 13.20 and 11.20 mm size respectively including preparing the road surface and tack coat with hot straight run bitumen including consolidation with road roller of 6 o 9 ton capacity including seal coat complete with including the cost of bitumen @ 2.96 kg/sqm</i>	1000 sqm	sqm		
	TOTAL				

Total amount (in words) Rs. -----

Seal and signature of contractor

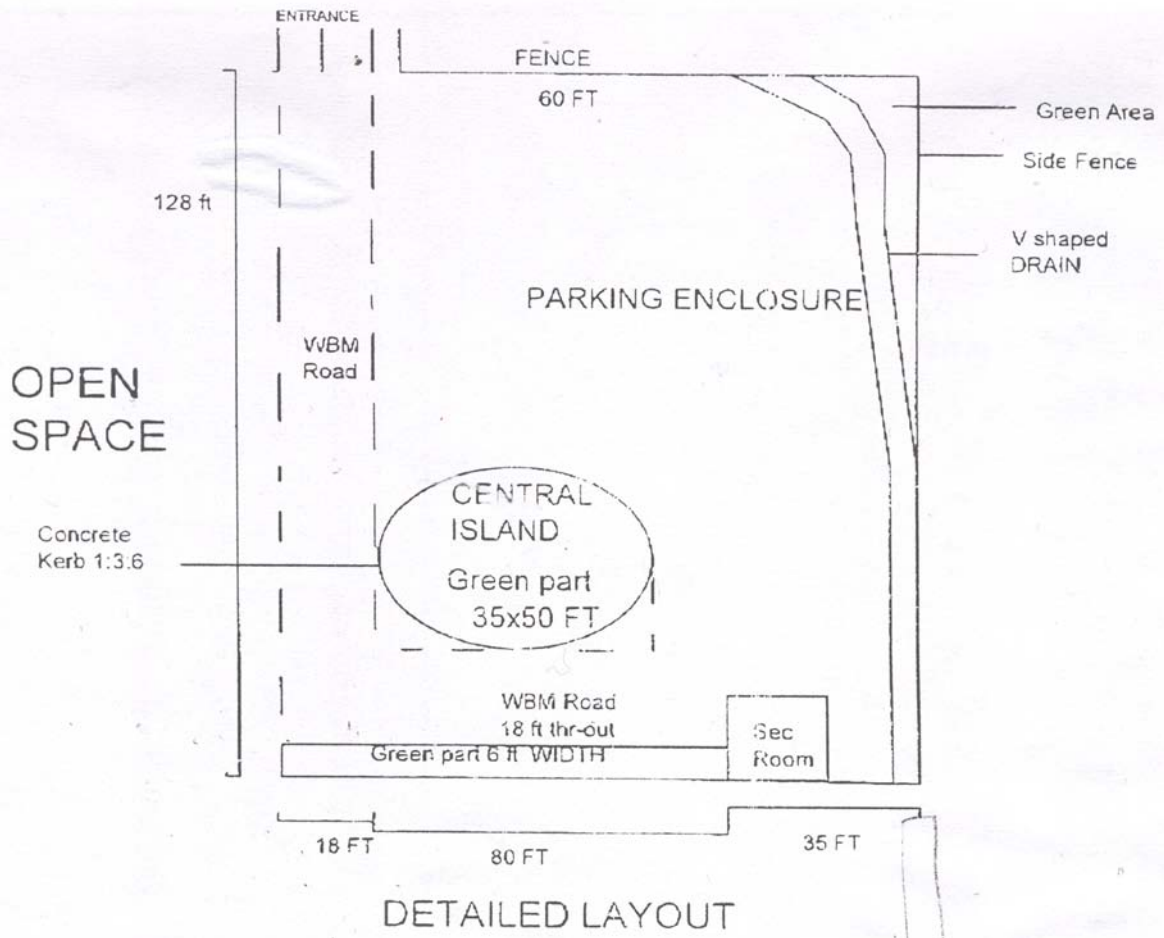

DETAILED LAYOUT